



Pin No.	Define
1	RESET
2	RS
3	CSB
4	SCL
5	SDA
6	VSS
7	VDD
8	CAP1P
9	CAP1N
10	VOUT
11	V0

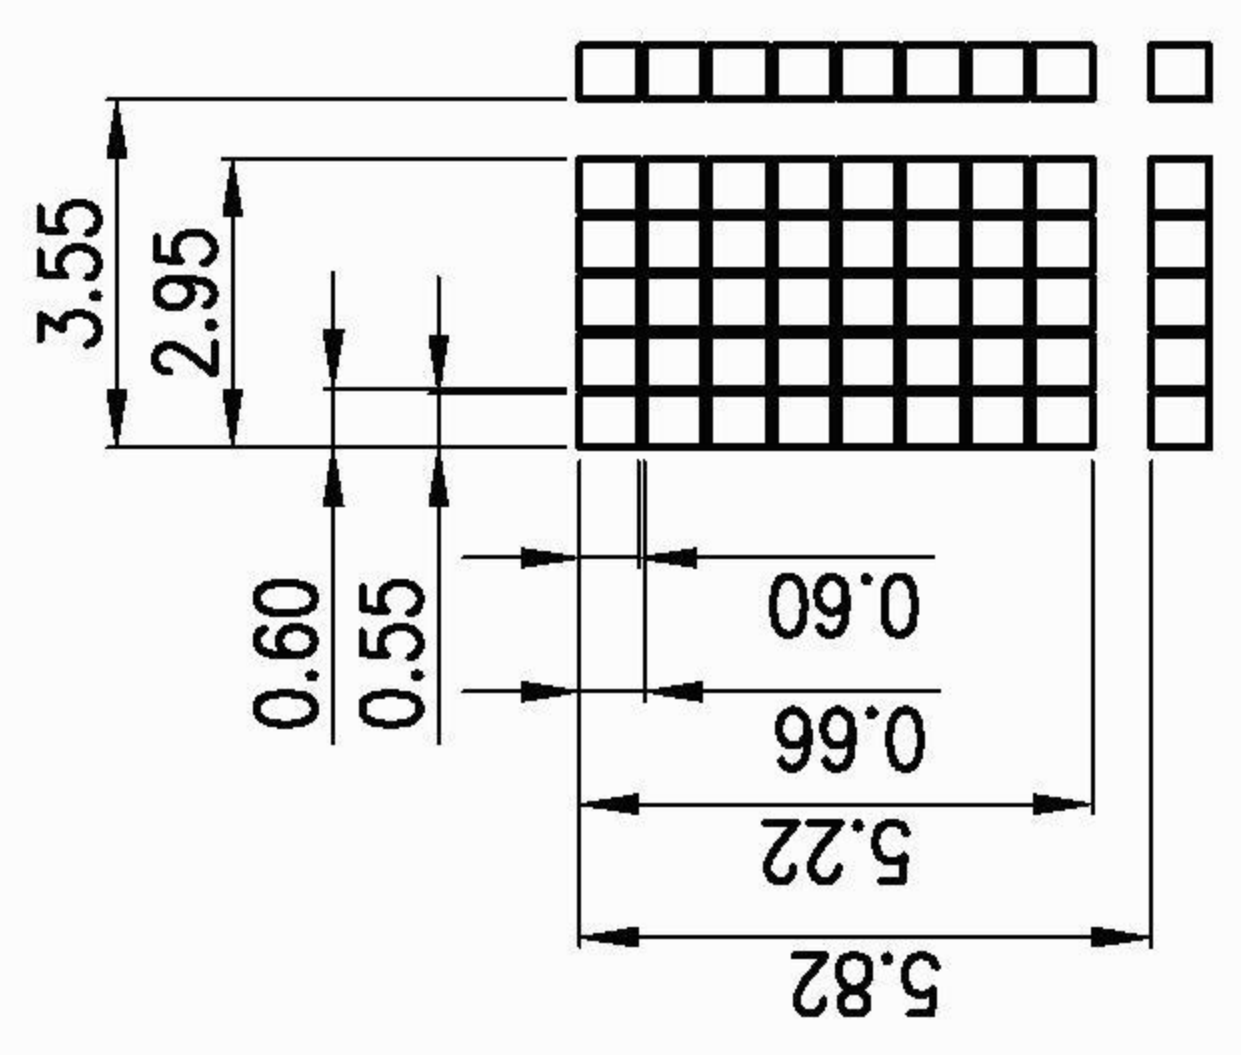

DETAIL DOTS  
SCALE 3/1

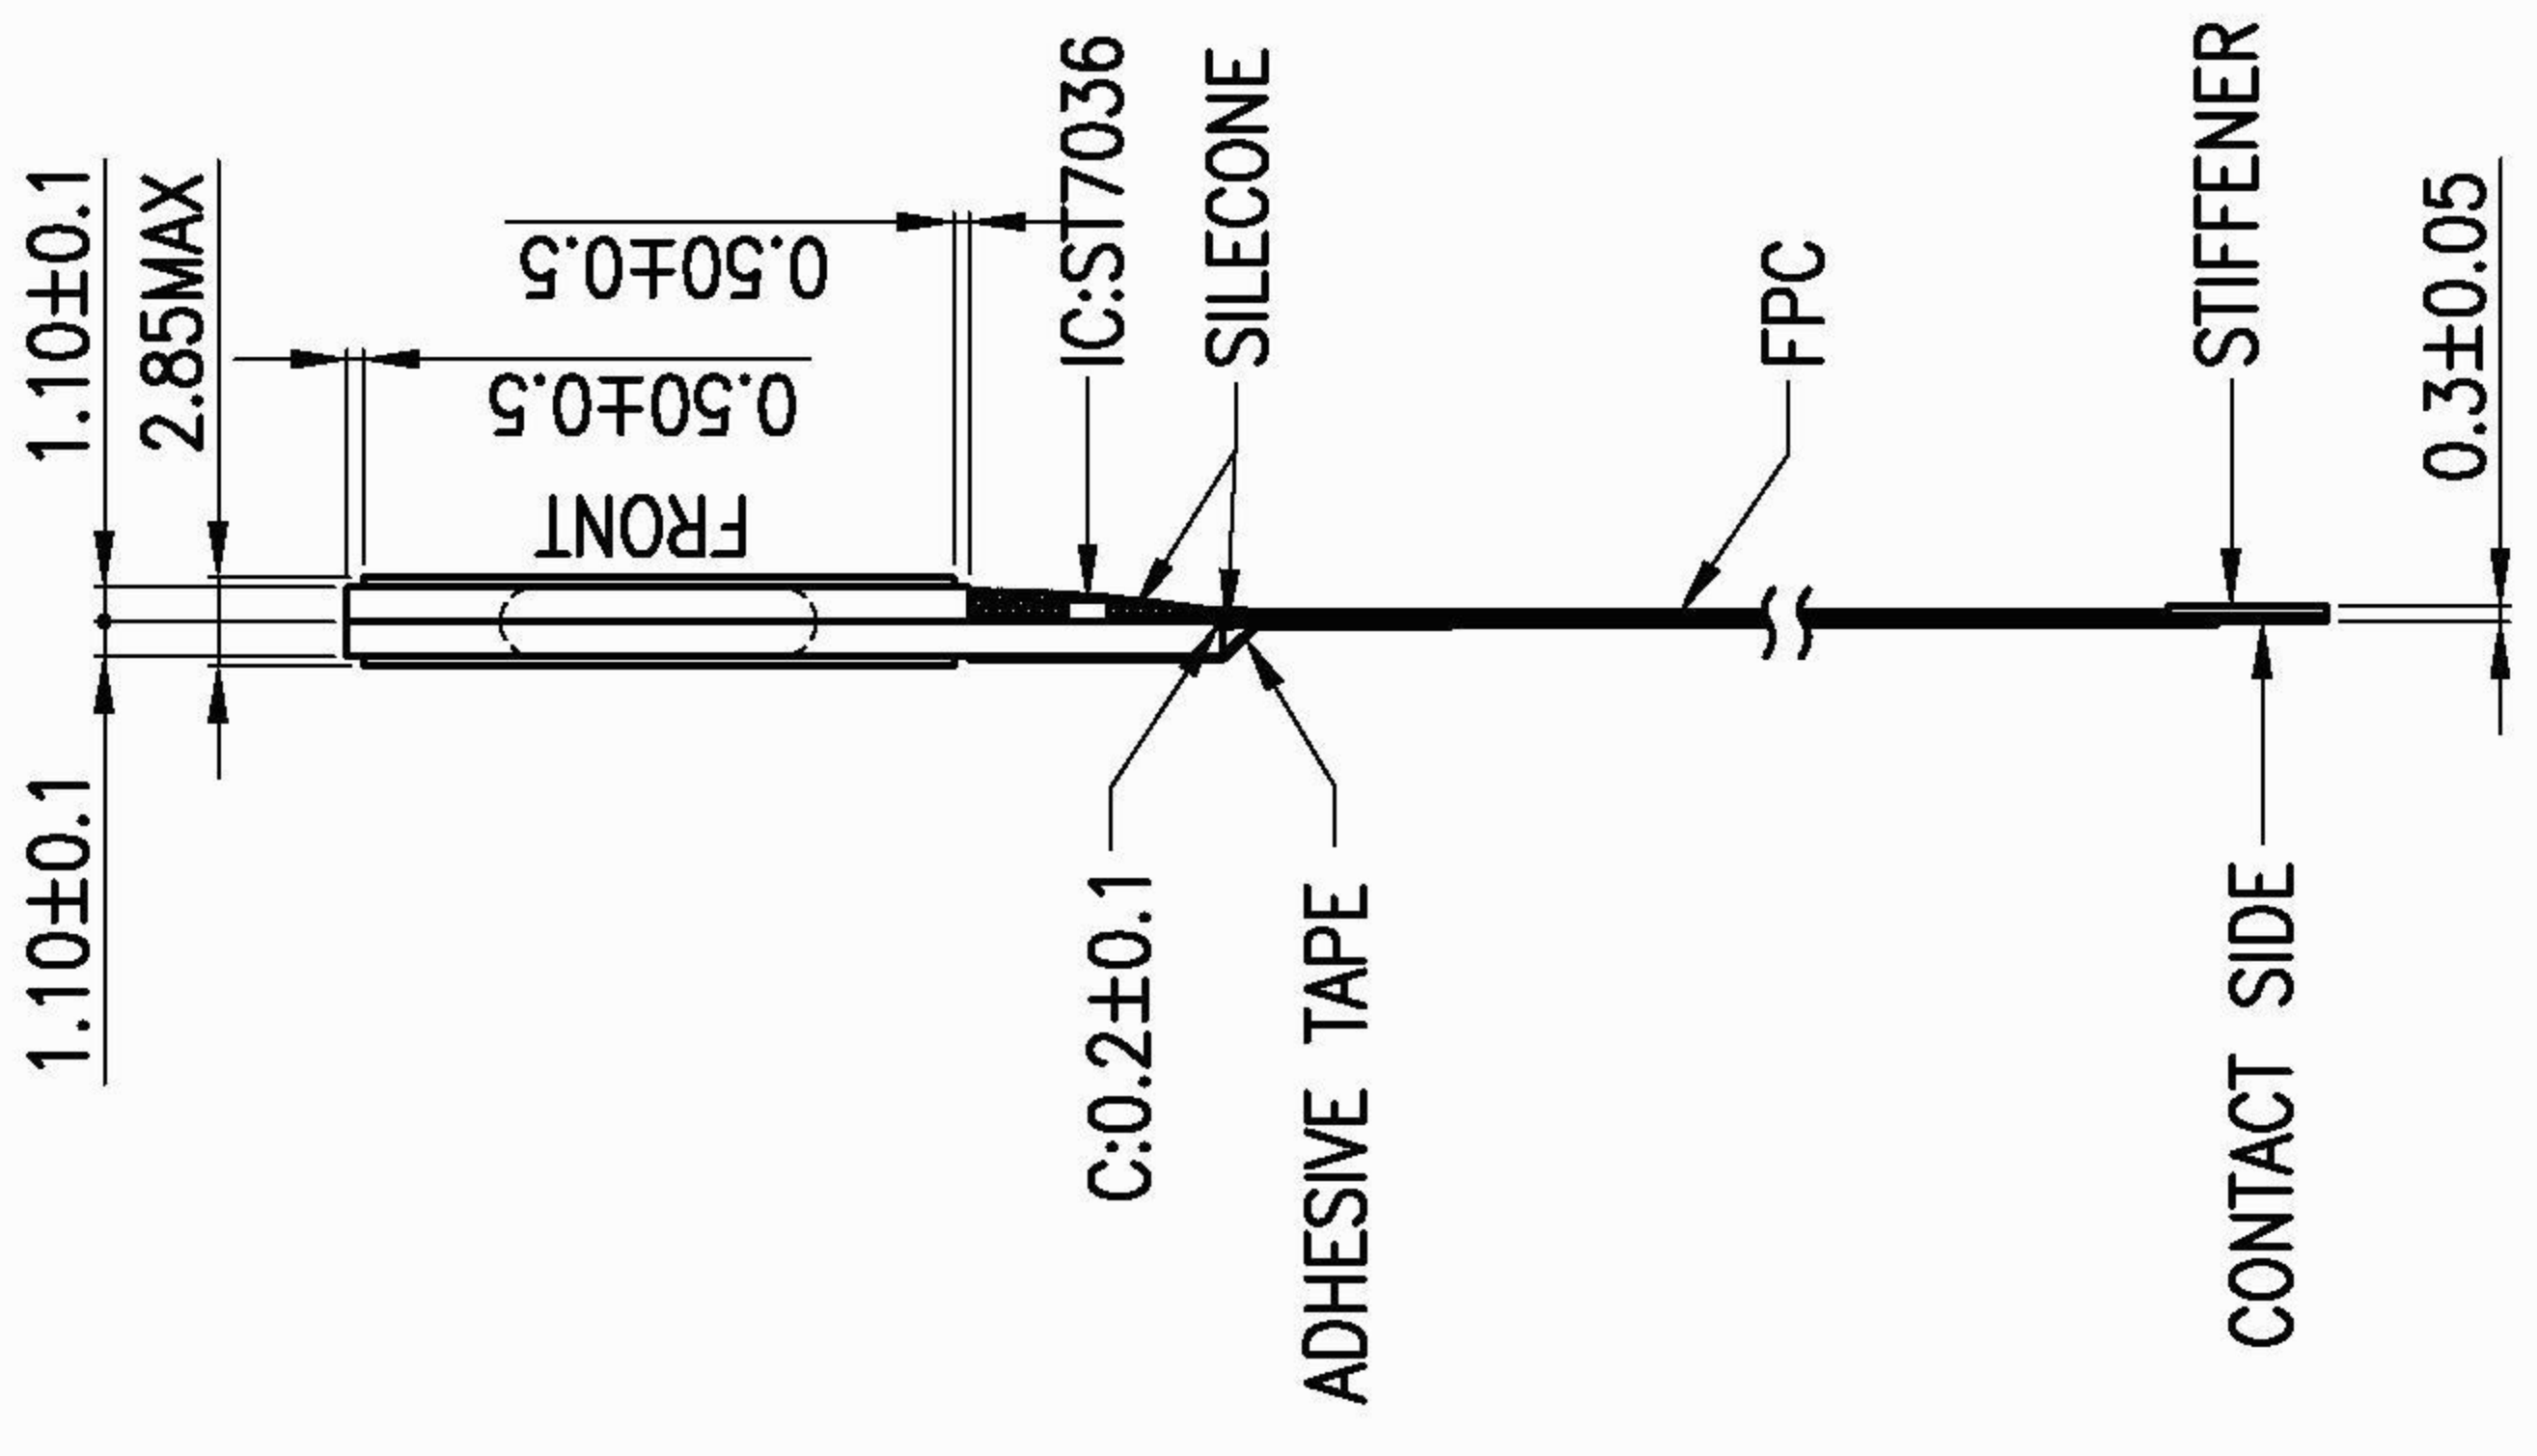

# KENTEC DISPLAY

VER.	REVISED RECORD	DATE	LCM SPECIFICATION								
A0	NEW ISSUE	10.03.27	1.DISPLAY TYPE	STN/POSITIVE	5.VLCD / VDD	4.5 V/3.3 V	APPROVED BY	CUSTOM NO.	NE-3108	UNMARKED TOLERANCE	±0.2
A1	Vop=5.0V---->4.5V	10.04.28	2.VIEWING DIRECTION	12 D'CLOCK	6.OPERATION TEMP.	0 °C TO 50 °C	CHECKED BY	DESIGN NO.& (VERSION)	A0	UNIT	mm
A2			3.POLARIZER MODE	REFLECTIVE	7.STORAGE TEMP.	-10 °C TO 60 °C	DRAWN BY	MODEL NO.	KT1602-021	SHEET	1 OF 1
A3			4.DRIVE METHOD	1/17 DUTY 1/5 BIAS	8.CONNECTOR	COG/FPC	REMARK	JNX	10.03.27		
								IC:ST7036			